

RFID 集装箱封条锁安全螺栓封条

Draft
初稿

RFID Container Seal Lock Security Bolt Seals




基本参数/Basic Parameters

尺寸/Size (L/OD x W/ID x H)	75mm(Bolt length)
重量/Weight	66.4g
材料/Materia	碳钢镀锌+PC+ABS/Carbon steel galvanization + PC + ABS
安装方法/Installation	悬挂/Hanging Style
抗拉强度/Tensile Strength	>15KN
颜色/Color	红、蓝、黄、白、黑、绿、任意颜色/red, blue, yellow, white, black, green, any color
特征/Characters	防伪(Tamper Proof)

产品特性/Product Feature

芯片/Chip Model	Alien Higgs 3/Higgs 4 (customized chip were supported)
协议/Protocol	ISO18000-6C
频率范围/Operating Frequency	860-960MHz
内存/Memory	TID 96 bit+EPC 96 bit +User Memory 512 bits
读 距/Reading Range	1000cm (depends on reader)
应用介质/Applicable Surface	空气(Air-free)
个性化选项/Option	定制彩色印刷条码文本或个性化编码Custom color printing(Embossing or laser-engraving) with barcode or text & personalization encoding

附加说明/Additional

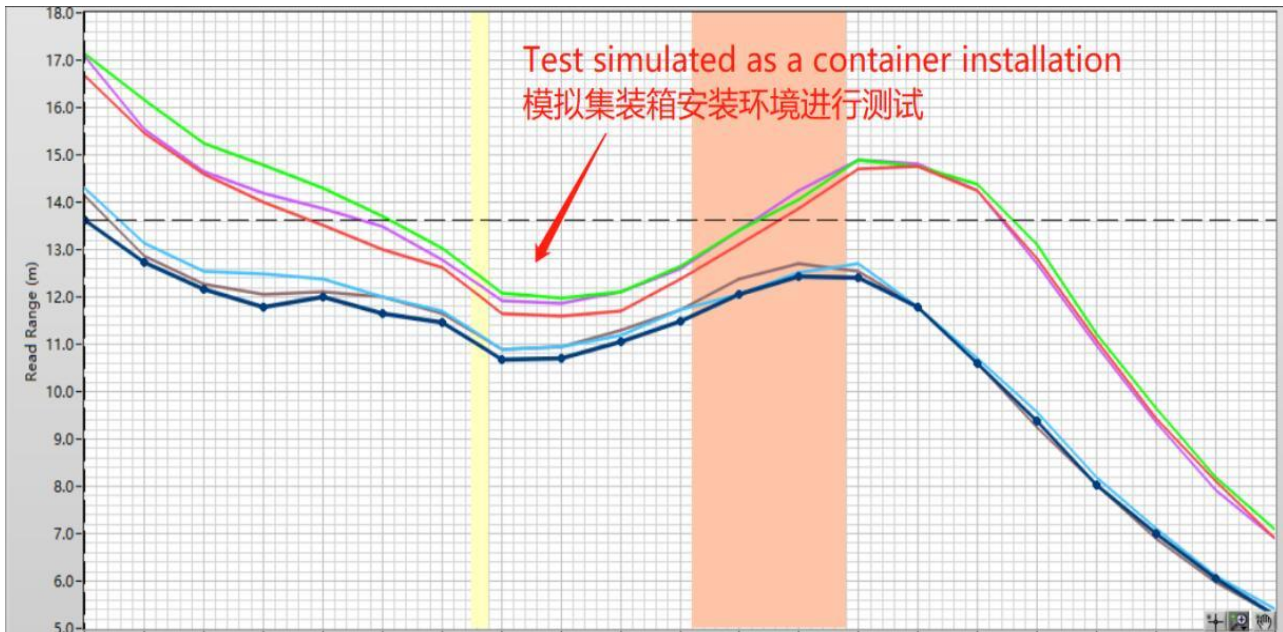



供货方式/Delivery & Supply Format

卷料供货每卷数量300-500片(特殊要求见附加说明) Supply in roll with 1000-3000PCS/Roll(Check Additional Note for your specific needs)

应用场景/Application

铅封标签（硬标）可广泛应用于物流中转箱封口，产品封口保护，包装箱封，集装箱、货架、设备仪器标识、医疗器械登记、固定工业资产、模具治具、零配件、化学药品、农副食品、动物管理领域，以实现产品的标识、跟踪、及溯源查询或监管，包括物流供应链、数字化仓储、溯源监管，以及相关涉密物品或涉隐私产品的封箱运输等。Hard electronic seal tag mainly used for sealing package of boxes, product seal protection, sealing for such as containers, components, industry spare parts, mould tooling, spare parts, chemical, pesticide, food, animal and so on with products identification, tracking including supervision management, logistics supply chain, digital warehousing, source traceability, even more sealing for related security items and confidential goods for the person.



环境参数/Environmental Parameter

数据保存/Data EEPROM Retention	50years
静电保护/ESD Limited Voltage	2KV
工作温度/Operating Temperature	-40℃ - 100℃
储存温度/Storage Temperature	0℃ - 25℃
操作湿度/Relative Humidity	10%-95%(Variant Performance)

声明/STATEMENT

上述数据是基于本公司对产品特性的一般了解，仅供一般信息参考。客户购买本产品时应在实际应用条件下测试结果来自行决定是否适用。英诺尔向购买者保证其在材料和工艺上没有不良。The above data is based on our company general understanding of the product attribute, is just for general reference. Buyer should evaluate product under the condition of practical application to decide whether it is suitable for your application. XMinnov guarantee their products to the buyers that there is no defect on product material and fabrication.

日期Date:2024/02/03 日期Date:2024/02/03